

Dual Input True RMS AC Voltage


Current Datalogger



Datalog up to 256,000 readings
With user programmable sample rate from 1 second to 24 hours

Features:

- Simultaneously measure two AC Voltage inputs or two AC Current inputs or one AC Voltage and one AC Current input
- Readings can be downloaded to your PC via the USB interface and analyzed using the included software or exported to a spreadsheet
- LCD indicates time/date, current readings and Min/Max
- Auto Power off and battery check
- Complete with two Current sensor modules, two Voltage sensor modules, two sets of test leads, two sets of alligator clips, USB cable, Windows compatible software, universal AC Adaptor, and 4 AAA batteries

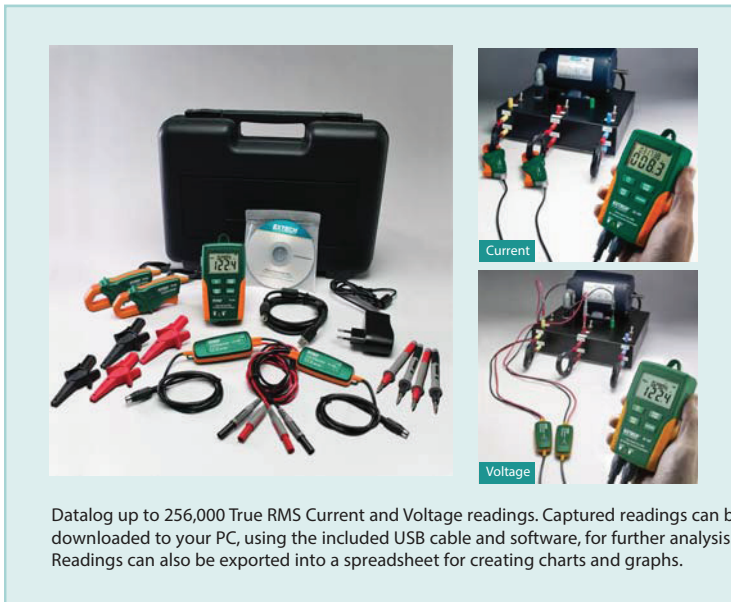

Datalog up to 256,000 True RMS Current and Voltage readings. Captured readings can be downloaded to your PC, using the included USB cable and software, for further analysis. Readings can also be exported into a spreadsheet for creating charts and graphs.

| Function | Range | Resolution | Basic Accuracy |
|---------------|------------------------------------|------------|----------------|
| AC Current | 10 to 200A | 0.1A | ±(2% rdg ± 1A) |
| AC Voltage | 10 to 600V | 0.1V | ±(2% rdg ± 1V) |
| Memory | 256,000 points | | |
| Sampling Rate | 1 second to 24 hours | | |
| PC Interface | USB includes software | | |
| Power | 4 x AAA batteries | | |
| Dimensions | 4.5 x 2.5 x 1.3" (114 x 63 x 34mm) | | |
| Weight | 8.7oz (248g) | | |

Ordering Information:

DL160.....Dual Input True RMS AC Voltage/Current Datalogger



airconcern

more info for Extech DL160

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire