


400A AC/DC Watt Clamp-on

✓ Measures Watts, Current, and Voltage
With AC/DC True Power measurements to 240kW

Features:

- True RMS AC Voltage and Current
- 0.9" (23mm) jaw opening
- Large 4000 count LCD display
- Fast 40 segment analog bargraph
- Data Hold, Max/Min recall, Auto Zero (DC current), plus low battery indication
- Frequency to 10kHz
- Auto power off
- Complete with test leads, 2 AA batteries, and carrying case

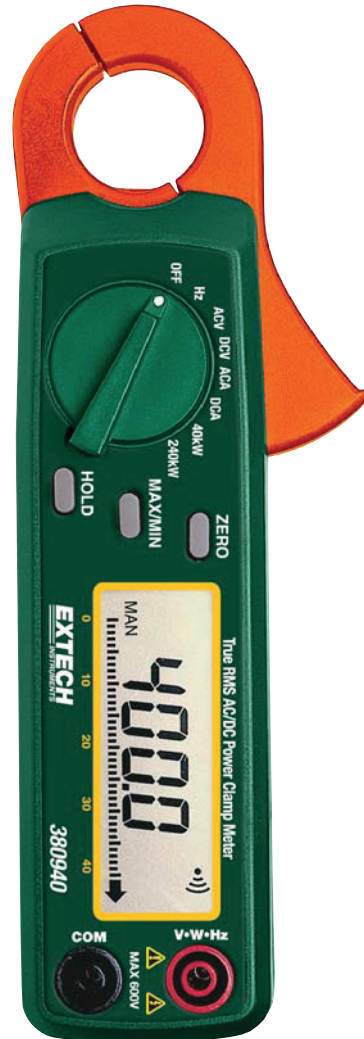

Specifications:	Range	Resolution	Accuracy \pm (%rdg+digits)	Input Signal Range
AC Power	40kW	10W	\pm (1.5% + 3d)@50/60Hz	0-250V, 0-400A, PF 0-1
	240kW	100W	\pm (1.5% + 3d)@50/60Hz	0-600V, 0-400A, PF 0-1
DC Power	40kW	10W	\pm (1.5% + 3d)	0-250V, 0-400A
	240kW	100W	\pm (1.5% + 3d)	0-600V, 0-400A
AC Current	400A	0.1A	\pm (1.5% + 3d)@50/60Hz	Overload protection: 600A AC (AC frequency range 40Hz-1kHz)
DC Current	400A	0.1A	\pm (1.5% + 3d)	Overload protection: 600A DC
AC Voltage	600V	1V	\pm (1.5% + 2d)@50/60Hz	Overload protection: 800V AC
DC Voltage	400V	0.1V	\pm (1.0% + 2d)	Overload protection: 800V DC
Frequency	10kHz	0.01-100Hz	\pm (0.8% + 2d)	Overload protection: 600V AC
Dimensions	7.2 x 2.5 x 1.4" (183 x 64 x 36mm)			
Weight	6.7oz (190g including batteries)			

Ordering Information:

380940.....400A AC/DC Watt Clamp-on
380940-NIST.....380940 with Calibration Traceable to NIST



airconcern

more info for Extech 380940

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire