


Real Time Octave Band Analyzer


 Type 2 integrating sound level meter
With Octave and 1/3 Octave Band Real Time Display

Features:

- Wide 100dB range of 30 to 130dB
- 160 x160 dot matrix backlit LCD displays
Leq, LE, Lmax, Lmin and Lp
- Built-in memory stores up to 12,280 records in SLM mode and
1024 data points in 1/1 or 1/3 octave mode
- Stored data can be easily transferred to a PC via
RS-232 interface and analyzed using software & cable provided
- A, C and Flat weighting with Fast or Slow response
- 25Hz to 10kHz frequency response
- Meets ANSI and IEC Type 2 standards
- Internal self test when powered ON
- Detachable 0.52"(13.2mm) diameter condenser
microphone and Tripod mount provided on rear
- Analog AC/DC recorder output
- Real time clock with Year, Month,
Day, Hour, Minute and Second display
- Optional microphone extension cable for measurements in
enclosures and other remote locations (407764-EXT)
- Complete with microphone wind cover, PC software on CD,
Serial cable, four type C size batteries, adjustment screwdriver,
120VAC adaptor and carrying case

Applications:

- Real time analysis of noise from any source
such as machinery or vehicles
- Monitor office or plant noise and
store data for later reference and analysis
- Maintain noise level statistics for internal
and external audits
- Perform machinery noise monitoring or
use for noise reduction programs

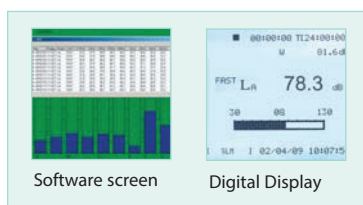

Ordering Information:

407790..... Octave Band Sound Analyzer
407790-NIST 407790 with NIST certificate
407764-EXT 15ft (4.7m) Microphone Extension Cable
407744..... 94dB Sound Level Calibrator
407766..... 94/114dB Sound Level Calibrator
USB100..... RS-232 to USB Adaptor



Complete with Windows
95/98/NT/2000/ME compatible
software, Serial cable, 4 x C
batteries, mini screwdriver,
120V AC adaptor, and case.

Specifications	
Applicable standards	ANSI S1.4 Type 2, EN IEC 60651, EN IEC 60804, and EN IEC 1260-1995
Accuracy	±1.5dB (ref 94dB @ 1kHz)
Measurement range / function	30dB to 130dB / La, Lc, Lp, Leq, LE, Lmax, Lmin
Frequency range	25Hz ~ 10kHz
Sound level meter display	Integrating SLM: Digital, 4 Digits with Bargraph
Real Time Analyzer display	Graphical, Bargraph with cursor
1/1- 1/3 Analyzer level range	30 to 130dB
1/1 Octave and 1/3 Octave	1/1 Octave band center frequencies: (9 bands); 1/3 Octave band center frequencies: (27 bands):
Signal output	AC output: 2 Vrms (at full scale); DC output: 10mVDC/dB
Power	Four type C size 1.5V batteries, External DC power: 6V, 1A
Safety/Warranty	CE approved, one year warranty
Dimensions/Weight	13.6 x 3.9 x 2.4" (345 x 100 x 60mm)/ 33.5oz (950g)



airconcern

more info for Extech 407790

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire