

# MultiPro<sup>®</sup> Series Professional MultiMeters

High Performance Autoranging Digital MultiMeters with RS-232 PC Interface  
True RMS is ideal for voltage and current measurements of distorted waveforms in office and industrial locations

## Features:


- High basic DC Voltage accuracy of 0.08%
- Wide AC Voltage bandwidth of 40Hz to 20kHz
- Rugged design with protective holster and water resistant housing
- Optically isolated RS-232 PC interface with Windows<sup>®</sup> 95/98/NT/2000/ME/XP compatible software (optional) allows user to collect, display, plot, save or export data or graphs
- Backlit 5000 count LCD display for high resolution (0.01mV, 0.1µA, 0.01Ω, 0.01nF, 0.001Hz)
- Smart auto power off is disabled if signal is present at test leads
- Hold and low resistance auto-lead zero
- Measurement functions include AC/DC Voltage and Current, Resistance, Frequency, Capacitance, Diode and Continuity
- Complete with built-in stand, CAT IV test leads, protective holster, 9V battery and temperature probe (-22 to 572°F/-30 to 300°C) for MP530A

## Additional Features Model MP530:

- True RMS measurements for AC Voltage and Current
- °F/°C Temperature function
- Analog bargraph Zoom provides 5x resolution to detect small signals (updates 60/sec)

## Applications:

- Wide bandwidth for audio frequency and digital electronic production test and repair
- Wide AC Voltage bandwidth of 40Hz to 20kHz

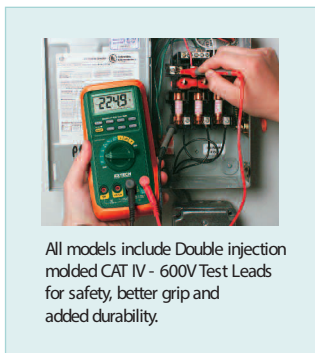

All models include Double injection molded CAT IV - 600V Test Leads for safety, better grip and added durability.

## Ordering Information:

- MP510A .....MultiPro<sup>®</sup> Professional MultiMeter
- MP510A-NIST ..MP510A w/ Calibration Traceable to NIST.
- MP530A .....MultiPro<sup>®</sup> True RMS Professional MultiMeter & Temp
- MP530A-NIST ..MP530A w/ Calibration Traceable to NIST.
- SW810A .....MultiPro<sup>®</sup> Software CD and RS-232 Cable
- USB100 .....RS-232 to USB Adaptor
- TP873 .....Spare bead wire Temperature Probe
- TL805 .....Spare set of CAT IV-600V Test Leads
- TL807 .....Set of Alligator Clips (2pk) for TL805
- CA899 .....Vinyl Pouch Carrying Case

Specifications	Range	Max. Resolution	Basic Accuracy (%rdg+digits)
DC/AC Voltage:	50mV, 500mV, 5V	0.01mV	±(0.08%+2d) DC
	50V, 500V, 1000V		±(0.8%+3d) AC
DC/AC Current:	500µA, 5000µA, 50mA	0.1µA	±(0.2%+4d) DC
	500mA, 5A, 10A		±(0.8%+4d) AC
Resistance (Ω)	50, 500, 5k, 50k	0.01Ω	±(0.1%+2d)
	500k, 5M, 50MΩ		
Capacitance	50nF, 500nF, 5µF	0.01nF	±(0.8%+3d)
	50µF, 500µF, 9999µF		
Frequency	5Hz to 125kHz	0.001Hz	±(0.01%+2d)
Temperature (MP530A only)	-58 to 1832°F (-50 to 1000°C)	1°F/°C	±(0.3%+3d)
Dimensions/Wt	7.32 x 3.42 x 1.39" (186 x 87x 35.5mm) / 0.75lb (340g)		



**airconcern**

more info for Extech MP530A

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire