


MS6000 Series 2-Channel Digital Oscilloscopes

PRODUCT DATASHEET

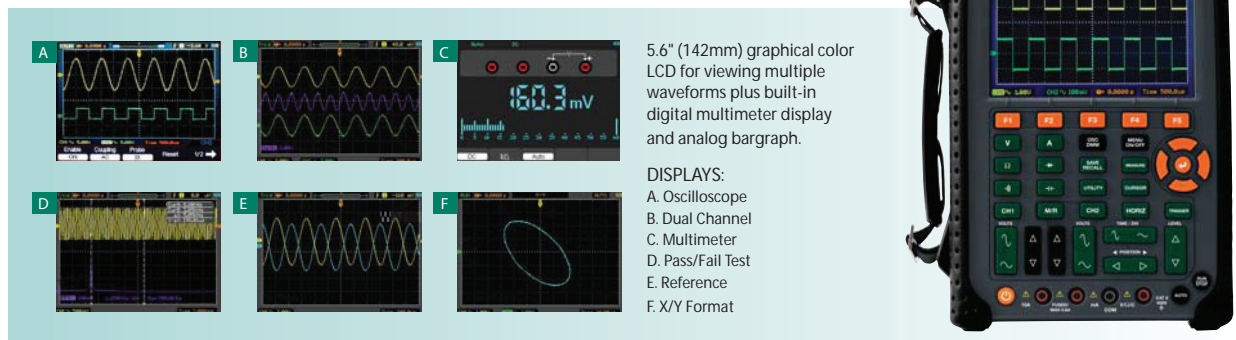

5.6" (142mm) graphical color LCD for viewing multiple waveforms plus built-in digital multimeter display and analog bargraph.

DISPLAYS:
A. Oscilloscope
B. Dual Channel
C. Multimeter
D. Pass/Fail Test
E. Reference
F. XY Format

Features

- Three models to choose from:
 - Model MS6060 — 60MHz bandwidth
 - Model MS6100 — 100MHz bandwidth
 - Model MS6200 — 200MHz bandwidth
- One-touch automatic setup optimizes the position, range, timebase, and triggering to assure a stable display of virtually any waveform
- Easy-to-use pop-up menu with built-in multi-language system
- 23 Automatic Measurements
- Waveform Math: Add, Subtract, Multiply, and Divide
- Store and recall up to 1000 waveform screens and setups using the installed 2G microSD card
- Automatic cursor tracking measurements
- XY Mode
- Built-in FFT function converts a time-domain signal into its frequency components to measure harmonic content and distortion in systems
- Waveform Recorder to capture/replay input waveforms from CH1 and CH2 with a maximum record length of 1000 frames
- Pass-Fail function compares a stored waveform to an unknown input
- Average Mode for smoothing waveforms
- Square Wave Output (2V, 1kHz) for probe adjustment
- Built-in 6,000 count True RMS MultiMeter with analog bargraph
- Complete with two 1X/10X oscilloscope probes, test leads, 7.4V Li-Ion battery, universal AC charger, and carrying case



airconcern

more info for Extech MS6060

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk