


Humidity/Temperature Datalogger

- Records up to 16,000 readings for each parameter
- Datalogs 16,000 Humidity and 16,000 Temperature readings with a user programmable sample rate

Features:

- USB interface for easy setup and data download
- Selectable data sampling rate: 1 second to 24 hours
- User-programmable alarm thresholds for RH and Temperature
- LCD displays current readings, Min/Max, and alarm status
- Complete with 3.6V Lithium battery, mounting bracket with combination lock, and Windows 2000, XP, and Vista compatible analysis software

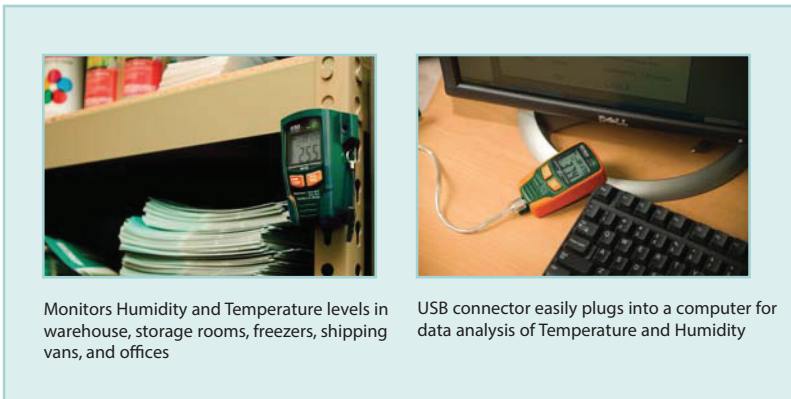

Monitors Humidity and Temperature levels in warehouse, storage rooms, freezers, shipping vans, and offices

USB connector easily plugs into a computer for data analysis of Temperature and Humidity

Specifications	Range	Resolution	Accuracy (%rdg+digits)
Temperature	-40 to 158°F	0.1°F/°C	±1.8°F (14 to 104°F)
	-40 to 70°C		±3.6°F (all other ranges) ±1.0°C (-10 to 40°C) ±2.0°C (all other ranges)
Humidity	0 to 100%RH	0.1%RH	±3%RH (40 to 60%) ±3.5%RH (20 to 40 & 60 to 80%) ±5%RH (0 to 20 & 80 to 100%)
Datalogging interval	1 second to 24 hours		
Memory	Temperature: 16,000 points; Relative Humidity: 16,000 points		
Dimensions	3.7 x 1.9 x 1.2" (94.4 x 48.9 x 31.2mm)		
Weight	3.2oz (90.7g)		

Ordering Information:

RHT20.....Humidity and Temperature USB Datalogger



airconcern

more info for Extech RHT20

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk