

# 80W Switching Mode DC Power Supply




## 3-in-1 Power Supply

Three output ranges perform like 3 power supplies in one

### Features:

- Constant voltage or current
- 3 selectable ranges:
  - 0.10 to 16.40V/0.100 to 5.100A
  - 0.10 to 27.60V/0.100 to 3.100A
  - 0.10 to 36.80V/0.100 to 2.300A
- 4-Digit LED displays
- Front/Rear output terminals
- Remote sensing for accurate applied voltage at load point
- Compact slim tower housing is ideal for tight work bench
- Lightweight for easy portability
- Complete with AC Power cord

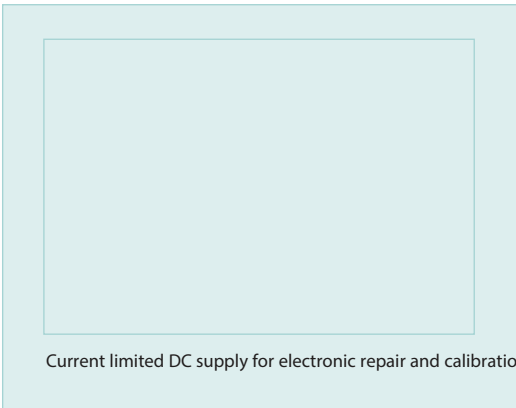

Current limited DC supply for electronic repair and calibration

| Specifications            |                                  |                 |                 |
|---------------------------|----------------------------------|-----------------|-----------------|
| Voltage Output (3 ranges) | 0.10 to 16.40V                   | 0.10 to 27.60V  | 0.10 to 36.80V  |
| Current Output (3 ranges) | 0.100 to 5.100A                  | 0.100 to 3.100A | 0.100 to 2.300A |
| Basic accuracy            | ±1%                              |                 |                 |
| Ripple & Noise            | <30mVpp                          |                 |                 |
| Line Regulation           | <4mV                             |                 |                 |
| Load Regulation           | <20mV                            |                 |                 |
| Display                   | Dual 4-digit LED displays        |                 |                 |
| Power                     | 90-264VAC; 47-63Hz               |                 |                 |
| Dimensions                | 13 x 5 x 2" (330 x 127 x 53.5mm) |                 |                 |
| Weight                    | 4.2lbs (1.9kg)                   |                 |                 |

### Ordering Information:

382260 .....80W Switching Mode DC Power Supply



**airconcern**

more info for Extech 382260

Phone: 01235 838 555

Email: [cs@airconcern.co.uk](mailto:cs@airconcern.co.uk)

Web: [www.airconcern.co.uk](http://www.airconcern.co.uk)