

Analog Sound Level Meter


✓ Check noise level economically
With bright, easy-to-read analog display

Features:

- Tripod mount and 9V battery powered, ideal for field use
- Analog output for connection to chart recorders, dataloggers, etc.
- Selectable weighting ('A' or 'C') and response time (Fast or Slow)
- MAX HOLD front-panel select switch locks highest reading on the display
- Complete with 9V battery
- Two-color, bright analog display with battery check
- Measurement range from 54 to 126 dB in 7 ranges
- Built-in 0.5" Electret Microphone

Applications:

- Identify noise ordinance violations, traffic noise measurements, community noise measurements, theater acoustic studies, stereo balancing.

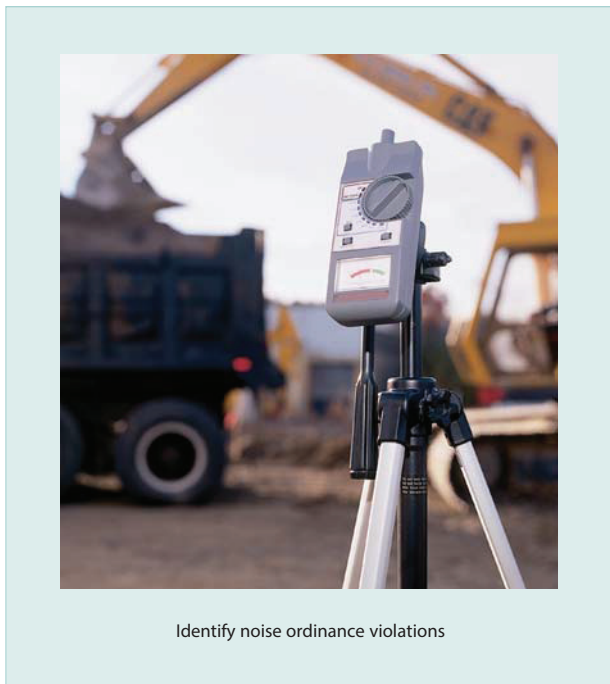

Identify noise ordinance violations

| Specifications | |
|----------------|------------------------------------|
| Range | 54 to 126 dB |
| Accuracy | ± 2dB @ 94dB, 1000Hz |
| Weighting | 'A' and 'C' (Selectable) |
| Response time | FAST and SLOW (Selectable) |
| Microphone | 0.5" Electret Condenser type |
| Analog output | AC: 0.707Vrms |
| Power Supply | 9V Battery |
| Dimensions | 2.7 x 7.1 x 1.4" (68 x 180 x 36mm) |
| Weight | 5.1 oz. (160g) |

Ordering Information:

407706.....Analog Sound Level Meter
407706-NIST407706 with NIST Certificate



airconcern

more info for Extech 407706

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire