


# Mini Digital MultiMeter + IR Thermometer

✓ 8 Function, rugged designed multimeter with built-in IR Thermometer  
Quickly identify overheating motors or locate hot spots on electrical panels and HVAC vents without contact

## Features:

- Built-in IR Thermometer with laser pointer for locating hot spots
- 4:1 Distance to Target Ratio
- 2000 count large backlit dual LCD with easy-to-read digits
- Low current capability measure down to 0.1µA
- Max Hold
- Input fuse protection
- Auto power off and Data Hold
- Complete with test leads and 9V battery

**BUILT IN IR**  
**Thermometer**  
Patented

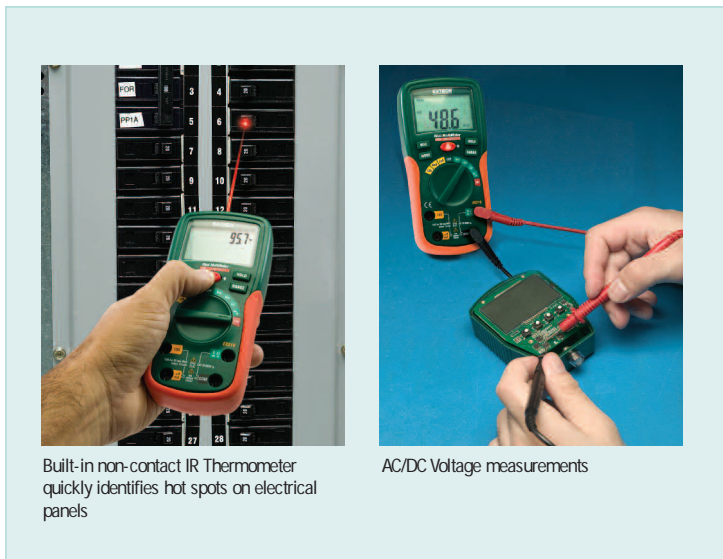

Built-in non-contact IR Thermometer quickly identifies hot spots on electrical panels

AC/DC Voltage measurements

Specifications	
AC Voltage	0.1mV to 600V
DC Voltage	0.1mV to 600V
Basic Accuracy (VDC)	±0.5%
AC Current	0.1µA to 10A
DC Current	0.1µA to 10A
Resistance	0.1 to 20M
Temperature (IR)	-5 to 446° F (-20 to 230° C)
Continuity / Diode	Yes
Dimensions	5.8x2.9x1.6" (147x76x42mm)
Weight	9.17oz (260g)

## Ordering Information

EX210 .....Autoranging MultiMeter + IR Thermometer  
EX210-NIST .....EX210 with Calibration Traceable to NIST.



**airconcern**

more info for Extech EX210

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire