


# 1200A 3-Phase Power Analyzer/Datalogger

 Saves data on an SD card in Excel® format  
For easy transfer to a PC for analysis

## Features:


- Large dot-matrix, sun-readable, numerical, backlit LCD
- Full system analysis with up to 35 parameters
  - V (phase-to-phase), V (phase-to-ground)
  - A (phase-to-ground)
  - KW / KVA / KVAR / PF (phase)
  - KW / KVA / KVAR / PF (system)
  - KWH / KVAH / KVARH / PFH (system)
  - Phase angle
- High accuracy autoranging current clamps (0.2A to 1200A)
- 600.0VAC input with CAT III-600V safety rating
- Adjustable Current Transformer (CT) and Potential Transformer (PT) ratio for high power distribution systems
- Log up to 30,000 reading on a removable SD memory card in Microsoft Excel® format
- Wide sampling rate range (2 seconds to 2 hours)
- Captured measurements can be imported directly into Excel via the SD memory card
- Easy-to-use onscreen menu
- Easy-to-grab rugged over molded housing



## Applications:

- AC Power Quality Evaluation
- Motor/Generator Installation
- Energy Audits

Complete with 3 current clamps, 4 voltage leads with alligator clips, 8 AA batteries, SD memory card, Universal AC adaptor (100 to 240V), and case

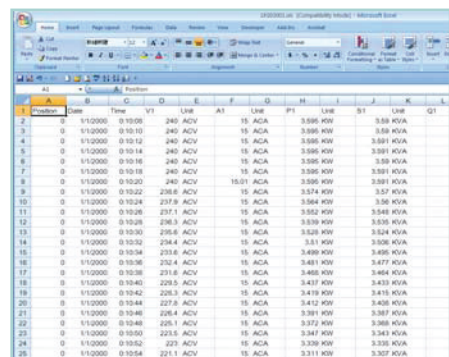

Backlit LCD displays numerical values



Transfer data from meter to PC using Extech software and SD memory card included and datalogged readings from the SD memory card (included)

Specifications	Range	Basic Accuracy
ACV (True rms)	600.0V	±(0.5%rdg+0.5V)
ACA	1200A	±(0.5%rdg+0.5A)
Active Power (MW)	9.999MW	±(1.0%rdg+0.08KW)
Apparent Power (MVA)	9.999MVA	±(1.0%rdg+0.08KVA)
Reactive Power (MVAR)	9.999MVAR	±(1.0%rdg+0.08KVAR)
Power Factor	0.00 to 1.00	±0.04
Frequency Range	45Hz to 65Hz	±0.1Hz
Phase	-180° to +180.0°	±1°
Active Power Energy (MWh)	0.0kWh to 9.999MWh	±(2.0%rdg+0.08KWh)
Apparent Power Energy (MVAh)	0.0KVAh to 9.999MVAh	±(2.0%rdg+0.08KVAh)
Reactive Power Energy (MVARh)	0.0KVARh to 9.999MVARh	±(2.0%rdg+0.08KVARh)
Datalogging	60,000 readings (2GB SD memory Card)	
CE/CAT rating	CE/CAT III-600V	
Dimensions	8.9 x 2.5 x 1.3" (225 x 125 x 64mm)	
Weight	Meter: 2.3lbs (1049g); Clamp: 1.2lbs (522g)	

## Ordering Information:

- 382100.....1200A 3-Phase Power Analyzer/Datalogger
- 382000.....Voltage Test Leads with Alligator Clips (4 leads)



**airconcern**

more info for Extech 382100

Phone: 01235 838 555

Email: cs@airconcern.co.uk

Web: www.airconcern.co.uk

Air Concern Ltd, Building 173 Curie Avenue Harvell Didcot, Oxfordshire